



FEATURES

LCD display with back lighting Modbus-RTU communication

MEASUREMENT PARAMETERS:

- Phase Voltage (L-N) & Line Voltage (L-L)
- Min & Max Phase and Line Voltage
- Phase Current and Neutral Current
- Min & Max Phase Current and Neutral Current
- Bidirectional kW, kvar (per phase & total)
- kVA (per phase & total)
- Min & Max kW, kvar and kVA
- Frequency
- True & Displacement Power Factor (per phase & total)
- Energy kWh, kvarh and kVAh
- THD Phase Voltage (L-N) & THD Phase Current
- Power Demand (kW, kvar & kVA)
- Maximum Power Demand (kW, kvar & kVA)
- Individual phase voltage & current harmonics (up to 32 harmonics)
- Operating hours & hour on

SPECIFICATIONS

DISPLAY TYPE

LCD display

MEASUREMENTS

3-phase 4-wire system
3-phase 3-wire system

CURRENT MEASUREMENT (TRMS)

CT primary : 5~9995 / 1~2999A
CT secondary : 5A / 1A
Minimum measurement : 5 mA
Accuracy : 5A : 0.5% from 1A to 6 A (secondary)
1A : 0.5% from 0.5A to 2A (secondary)
Burden : < 0.05 VA at 5 A
Sustained overload : 6 A

VOLTAGE MEASUREMENT (TRMS)

Nominal phase voltage : 20 ~ 300 V AC
Minimum measurement : 10 V
Accuracy : 0.5% at full scale
Phase voltage via VT : 60 ~ 33,000 V

POWER MEASUREMENT

Real power, apparent power, reactive power measurement
Measuring updating period : 1 s
Accuracy : 1.0%

POWER DEMAND

Interval : 1 ~ 30 mins

POWER FACTOR MEASUREMENT

Total and displacement power factor
Accuracy : 1.0%

FREQUENCY MEASUREMENT

Measurement range : 45 ~ 65 Hz
Measurement updating period : 1s
Accuracy : 0.5%

ENERGY ACCURACY

Active (according to IEC 62053-21) : class 1
Reactive (according to IEC 62053-23) : class 2

HARMONICS

Phase voltage & current : THD%
Individual up to 32nd order (through communication)

AUXILIARY POWER SUPPLY

AC voltage : 90 ~ 415 V AC
Frequency : 50 / 60 Hz
DC voltage : 100 ~ 300 V DC
Power consumption : < 3 VA

COMMUNICATION

Hardware interface : Isolated RS485
Protocol : Modbus-RTU
Baud rate : 4800, 9600, 19200, 38400

ENVIRONMENTAL CONDITIONS


Temperature : -10°C to 55°C
Humidity : 5% to 95%, non-condensing

MECHANICAL


Mounting : Panel mounting
Dimension (mm) : 96(w) x 96(h) x 87.5(d)
Enclosure protection : IP54 at the panel
IP20 at the body
Approximate weight : 0.40kg

TYPICAL APPLICATION DIAGRAM


3-PHASE 4-WIRE SYSTEM: 4CTs, direct V input

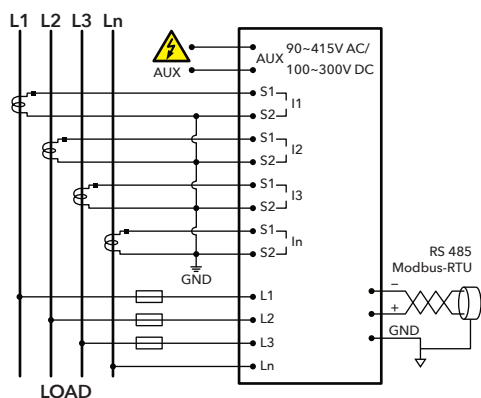


3-PHASE 4-WIRE SYSTEM: 3CTs, direct V input

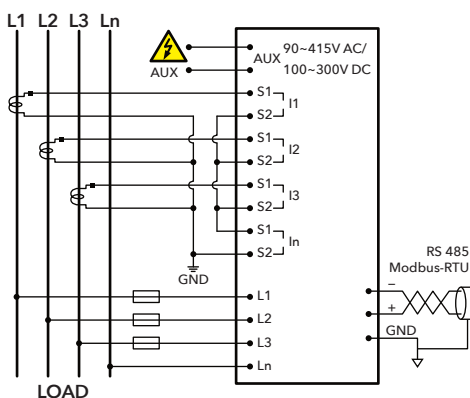

3-PHASE 3-WIRE SYSTEM: 3CTs, 3VTs

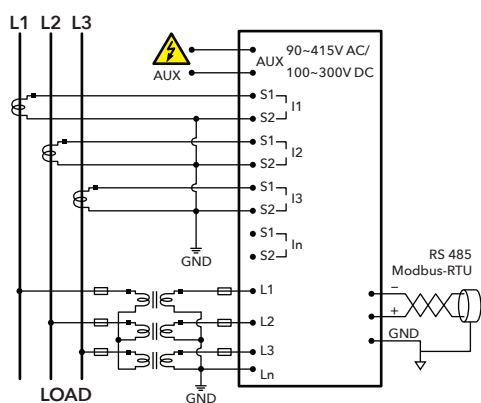

3-PHASE 3-WIRE SYSTEM: 2CTs, 3VTs

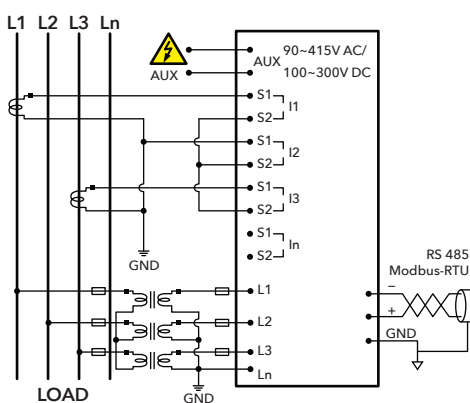

TEST STANDARDS

- IEC 61010-1
Safety requirement
- IEC 61326-1
EMC requirement

ORDERING INFORMATION

MODEL	DESCRIPTION
RX 380-415AD	Auxiliary Voltage 90~415 V AC or 100~300 V DC, with RS 485

CASE DIMENSION

