

NX233A



Features

- Microprocessor based numerical relay
- Current measurement based on fundamental frequency
- Three-phase, low-set overcurrent
- Three-phase, high-set overcurrent
- Local display of measured and set values
- Definite time for low-set and high-set
- Non-volatile fault value recording
- Programmable relay outputs
- Five selectable IDMT characteristic curves
- Complies with IEC 60255 standard
- ANSI Code : 50P, 51P

Technical Data

RATINGS

Rated current (I_n)	: 5 A
Rated frequency	: 50 or 60 Hz
Burden	: < 0.3 VA at I_n
Thermal withstand	: 4 x I_n continuous

ACCURACY

Protection thresholds	: $\pm 5\%$
Time delay	: $\pm 5\%$ with a minimum of 50 ms

INDICATORS

Auxiliary supply	: Green indicator
Pick-up	: Red indicator
Trip	: 7-segment display and Red indicators

AUXILIARY SUPPLY

Model NX233A-240A	: 198 ~ 265 V AC
Model NX233A-110A	: 94 ~ 127 V AC
Supply frequency	: 50 or 60 Hz
VA rating	: 3 VA typical

OUTPUT CONTACTS (R1 & R2)

Rated voltage	: 250V AC / DC
Contact rating	: 5 A
Expected electrical life	: 100,000 operations at rated current
Expected mechanical life	: 5 x 10 ⁶ operations

ENVIRONMENTAL CONDITIONS

Temperature	: -10°C to 55°C
Humidity	: 5% to 95%, non-condensing

MECHANICAL


Mounting	: Panel mounting
Dimension (mm)	: 96(w) x 96(h) x 110(d)
Enclosure protection:	IP54 at the panel
Approximate weight	: 0.8 kg

SETTING RANGES


Low-set ($I >$)	: 0.1 A to 10.0 A (2% to 200%)
Low-set time multiplier ($kt >$)	: 0.01 to 1.0
Low-set definite time ($t >$)	: 0.00 sec to 100 sec
High-set ($I >>$)	: 0.5 A to 100 A (10% to 2000%) or disable
High-set delay time ($t >>$)	: 0.00 sec to 100 sec

(0.00 to 1.00, step 0.01; 1.00 to 10.0, step 0.10; 10.0 to 100, step 0.5)


Normal Inverse

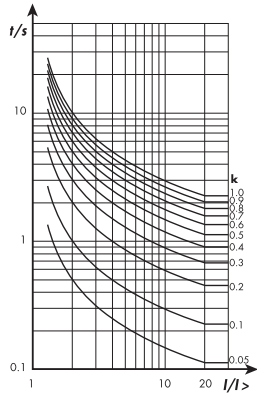


Very Inverse

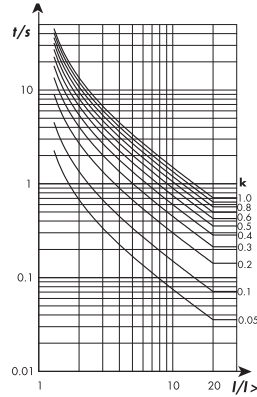


Long Time Inverse

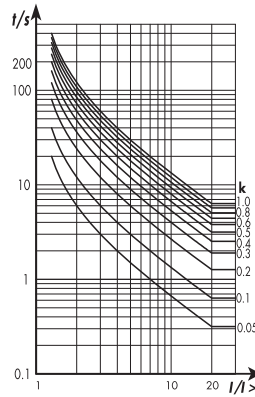


Extremely Inverse

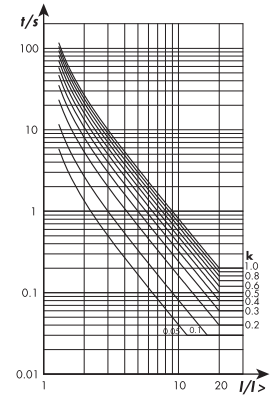


Normal Inverse 1.3/10

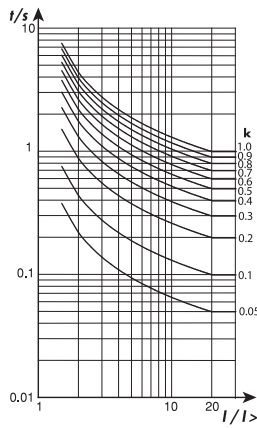

Typical Application Diagram

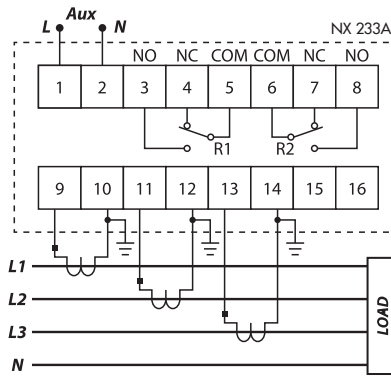

Case Dimensions

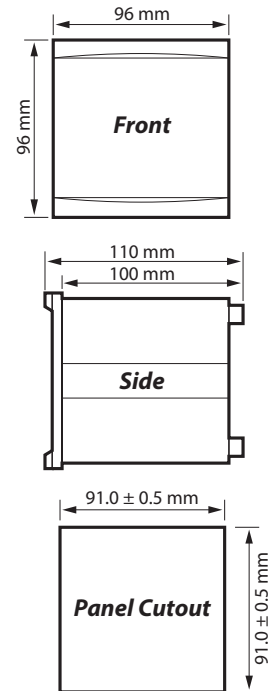

Ordering Information

MODEL	DESCRIPTION
NX233A - 240A	For 50/60 Hz system, auxiliary voltage 198 ~ 265 V AC
NX233A - 110A	For 50/60 Hz system, auxiliary voltage 94 ~ 127 V AC